INSTALLATION GUIDE

HITCH HIGHLIGHT LED LIGHT KIT For Semi-Truck Fifth Wheel Hitches

IMPORTANT! No two installation scenarios are the same. Accent lighting is highly subjective. Not everyone shares the same lighting or installation quality goals. Some folks are OK with twisting wires together, others want to solder and heat shrink them. Some folks are OK with running wires where they may be seen or unprotected to save money/time, others want a tidy, clean install so they wrap plastic split-loom around all exposed cables. Some folks are OK with mounting their LED strips to whatever surface they can find, others want to take the time necessary to build out appropriate mounting surfaces to provide the best lighting effect on their vehicle and maximize the longevity of their lighting system. The point is it's not possible to provide all the materials necessary for all installation scenarios on all types of vehicles to meet everyone's quality goals. Our light kits provide the essential components needed for a high-quality, functioning lighting system. Installation of our light kit to your specific vehicle will however likely require additional items to make it look, fit and work the way you want. This is particularly the case with electrical wiring, switching functionality and mounting surfaces for the LED strips. We have created a list of additional items you may need. Here's the link: https://www.boogeylights.com/other-items-you-might-need/. While we offer them for sale you can also find these items locally. We urge you to review this information before starting your install.

BENCH TEST YOUR LIGHTING COMPONENTS FIRST!

We know this takes a few extra minutes, but we STRONGLY suggest you bench test your lights AND your controller / switches on a table before doing anything further. Test all of them. While we test every light strip and controller before shipping, bench testing your lights will eliminate the possibility of any problems with the lights or controller before mounting. It also lets you know everything is working properly. Also, the process of bench testing gives you an opportunity to understand the wiring system without interference from other wires, connectors and cables. You can use any 12vdc battery to do this (e.g. car battery, motorcycle battery, lawn tractor battery or 12vdc power supply). Bench testing takes an extra 10 or 15 minutes. It's simple to do and can potentially save you hours of time and frustration down the road.


Did we mention the importance of bench testing every LED strip and controller first?

THIS IS A GUIDE. NOT A HOW-TO. It's simply not possible to provide detailed instructions for all installation scenarios. Far too many variables. The information in this manual is intended to be used as a guide. It is not a detailed step-by-step how-to installation manual. We do not spell out every single step along the way. We cover the essential steps related to installing this kit. Beyond that we assume the installer has the skills, knowledge and tools necessary to do the work using the information we provide as a guide. You may need to vary your installation and/or make adjustments based on your vehicle. This is particularly the case with electrical wire routing, electrical connections, electrical load sizing and switching. If you're unsure about how to do the installation – particularly the electrical components – we urge you to seek assistance from someone who has those skills.

YOU MUST HAVE AN UNDERSTANDING OF 12V POWER. An essential skill with installation of any Boogey Lights LED products is knowing how to correctly wire the product to a 12vdc circuit. This includes understanding the importance of having a properly sized fuse at the power source, polarity, how to properly seal an electrical connection, using properly sized wire gauge for the load, measuring voltage and measuring the additional amperage draw you're adding. If you are uncertain or unfamiliar with any of these concepts, we urge you to ask someone who has the knowledge to assist you onsite.

PREPARING THE MOUNTING SURFACE. How and where you mount your LED strips will for the most part determine the longevity of your lighting system. If you mount the LED strips to smooth, clean, continuous, straight, flat surfaces as we recommend, you can expect your lighting system to last for many years. The fifth wheel hitch area is typically not very clean on most trucks. If the area has a lot of grease or road grime it will be super important to first thoroughly clean that area. In most cases you'll need to use some sort of degreasing agent to get it clean. A WORD OF CAUTION. If you are using a degreasing agent to clean the frame rail area, be sure you use plenty of rubbing alcohol to remove any petroleum residue left over from that degreasing agent from the frame rail surface before applying the 3M ADHESION PRIMER. Any degreasing residue left over will counter-act the 3M Adhesion Primer. This is important if you want your LED strips to stay in place.

MOUNTING LOCATIONS. The hitch highlights mount to the frame rails under the hitch. Two heavy duty LED strips on each side. We prefer to mount the strips as high up as we can on the inside of the frame rails and mount the LED strips such that the direction of the LED is inward toward the hitch on both sides. We have a photo below showing these mounting locations. Whether or not these locations are available for mounting on all trucks will vary so you'll need to examine your truck to determine how much room you have. You may need to relocate existing wires / air hoses for optimal lighting effect.

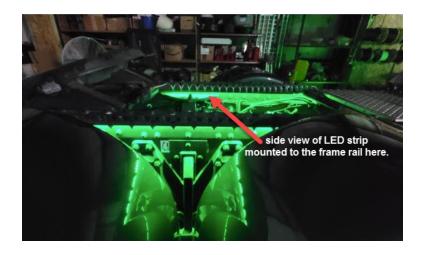



POWER. If you are connecting these hitch lights to an existing installation, you probably already have a good idea of where you will be connecting these four LED strips to. If this is a stand-alone installation (no other Boogey Lights kit installed) and you're installing an LED controller (or wireless on/off switch) with this kit, you'll need to remove the driver's side steps to access the batteries. You can mount it anywhere you have a dry area. We prefer to mount our led controllers in either the driver's or

passenger's side storage box but it's not required. You can just as easily mount the controller in the engine compartment or also inside the battery box. The key is making sure you're mounting it where it is protected from water or extreme heat. There should be air flow too around the controller. If mounting inside either of the storage boxes, you may need to drill a hole in the floor of that box to connect power to the battery box, led wires and antenna. If you purchased an LED controller and/or switching mechanism with this kit, we include the wiring docs and operating information separately (it can also be downloaded from our website too if you want.)

Follow these steps for mounting your LED strips:

- The area where you are mounting the LEDs has to be clean: free of all dirt, oil or anything that might affect the LED from sticking. You only get one opportunity to mount the LEDs so it's critical the area be prepared properly.
- Use rubbing alcohol to clean the area where you are going to mount the LED strip. Be sure to let the alcohol dry completely before proceeding to the next step. (Note: Do not use acetone or similar cleaner).
- Next, use the 3M Adhesion Promoter supplied with your kit to "paint" on the promoter where you are going to mount the LED strip. *This is an important step. Do not bypass.* Allow the promoter to dry for 60-90 seconds.

Do NOT bend the LED strip in a radius of less than 2 inches.



Do NOT bend the LED strip on a horizontal plane.



• Peel off the red backing tape that protects the 3M adhesive tape on your LED strip. Be careful not to let the tape touch anything. The 3M backing tape on these LED strips are one-use only. They cannot be reused.

Carefully push the LED strip to the area you have prepared. You will want to apply only enough pressure to the strip to make sure it is firmly mounted. *You only get one opportunity to do this.* Once the LED strip touches a properly prepared surface that has been promoted, that LED strip will be very difficult to remove. Moreover, if you do remove the LED strip, the strip cannot be used again without adding another layer of 3M adhesive tape to the back. DO NOT press too hard as too much pressure can damage the LEDs and connecting wires in the strip. Also, do not pull, stretch or twist the LED strip. Too much tension on the strip will also damage the LEDs such that some of the LEDs in the strip will not illuminate. The strip must be mounted flat against a single continuous mounting surface, in a straight line. Really important that the ENTIRE STRIP be stuck to the mounting surface and that you NOT attempt to span across multiple mounting surfaces.